


TEMPEST Powered by Mixergy®

HEAT PUMP CYLINDER WITH INTEGRATED 50L BUFFER



TECHNICAL DATA

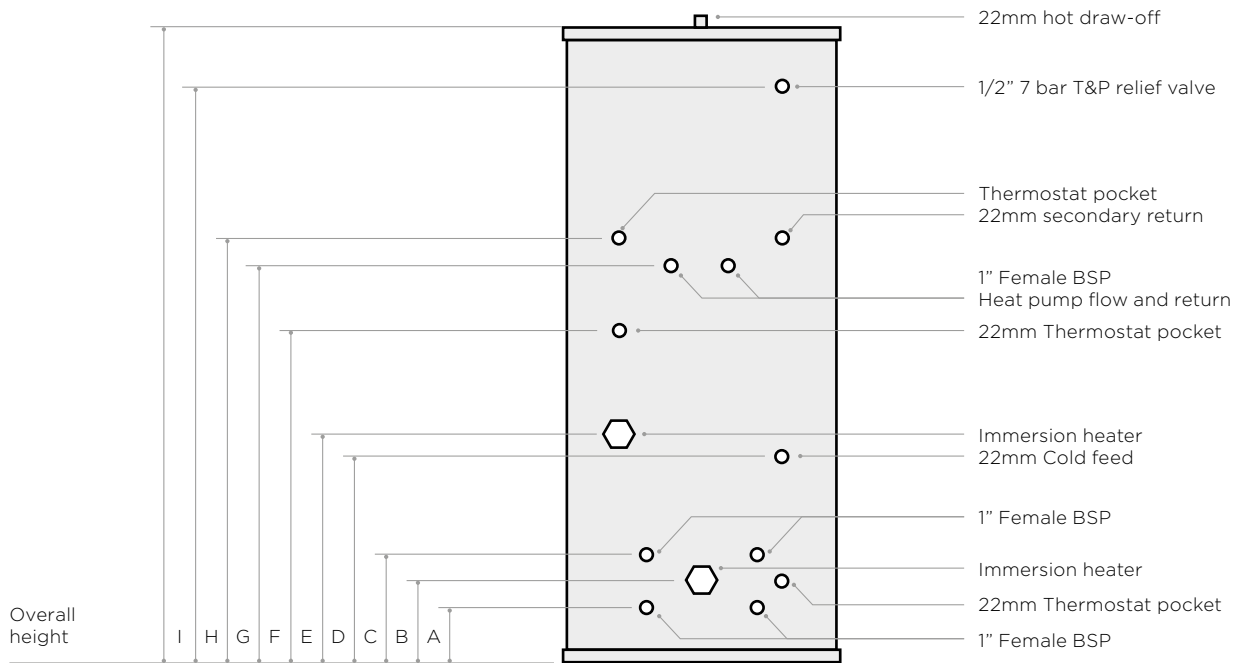

Capacity (L)	200 / 50	250 / 50	300 / 50
Height (mm)	1716	1921	2115
Diameter (mm)	580	580	580
A (mm)	193	193	193
B (mm)	243	243	243
C (mm)	293	293	293
D (mm)	675	675	675
E (mm)	705	705	705
F (mm)	1195	1225	1225
G (mm)	1395	1425	1425
H (mm)	1475	1505	1846
I (mm)	1523	1725	1915

Capacity (L)	200	250	300
ASHP Coil Surface Area (m ²)	3.3	3.3	3.3
ERP Rating*	C	C	C
Immersion Rating (kW)	3	3	3
Standing Heat Loss (kWh/24hrs)	1.54	1.83	2.08

*Based on thermostat set a 60°C