


# TEMPEST INDIRECT PLUS

## TECHNICAL DATA

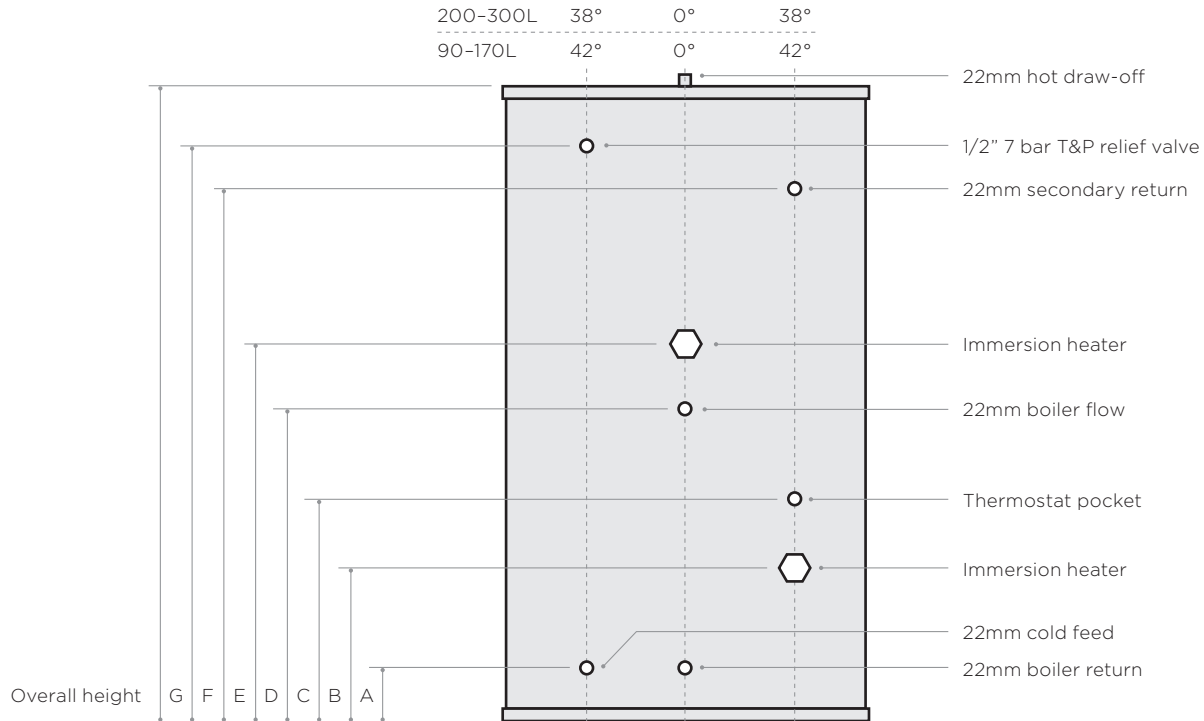

| Capacity (L)  | 90   | 125  | 150  | 170  | 200  | 250  | 300  |
|---------------|------|------|------|------|------|------|------|
| Height (mm)   | 1050 | 1200 | 1350 | 1650 | 1950 | 1950 | 2150 |
| Diameter (mm) | 580  | 580  | 580  | 580  | 580  | 660  | 660  |
| A (mm)        | 170  | 170  | 170  | 170  | 195  | 195  | 195  |
| B (mm)        | 200  | 200  | 200  | 200  | 225  | 225  | 225  |
| C (mm)        | 400  | 400  | 400  | 450  | 475  | 555  | 555  |
| D (mm)        | 495  | 495  | 495  | 600  | 625  | 825  | 845  |
| E (mm)        | 645  | 645  | 645  | 750  | 775  | 975  | 995  |
| F (mm)        | -    | -    | -    | -    | 1645 | 1535 | 1735 |
| G (mm)        | 870  | 1020 | 1170 | 1480 | 1760 | 1735 | 1935 |

| Capacity (L)                       | 90   | 125  | 150  | 170  | 200  | 250  | 300  |
|------------------------------------|------|------|------|------|------|------|------|
| Reheat from cold (minutes)         | 26   | 36   | 37   | 36   | 33   | 35   | 40   |
| Reheat from 75% draw-off (minutes) | 18   | 25   | 26   | 25   | 24   | 25   | 29   |
| ERP Rating*                        | A    | A    | A    | A    | A    | B    | B    |
| Immersion Rating (kW)              | 3    | 3    | 3    | 3    | 3    | 3    | 3    |
| Standing Heat Loss (kWh/24hrs)     | 0.77 | 0.86 | 0.91 | 0.96 | 1.01 | 1.34 | 1.68 |

\*Based on thermostat set a 60°C