


TEMPEST INDIRECT TWIN COIL SOLAR

TECHNICAL DATA

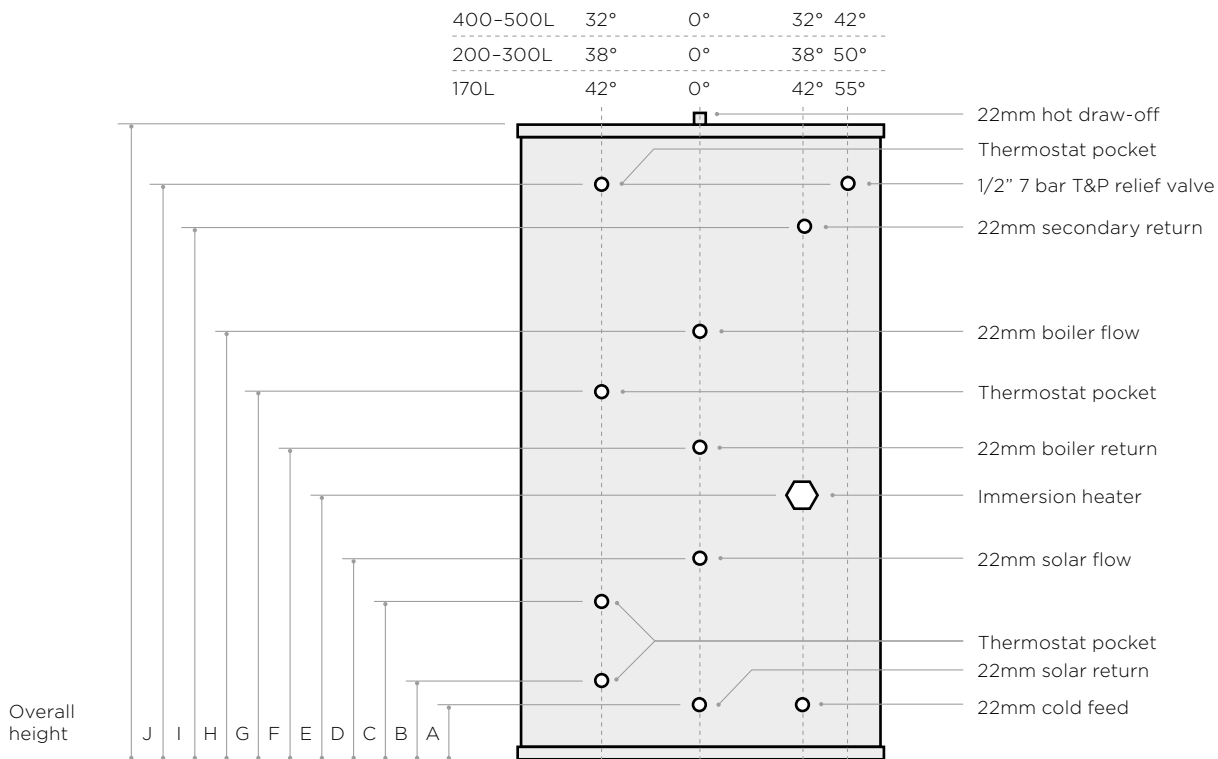

All unvented cylinders come with an unvented component kit to suit.

Capacity (L)	170	200	250	300	400	500
Height (mm)	1200	1120	1330	1650	1590	1835
Diameter (mm)	510	580	580	580	710	710
A (mm)	175	190	190	190	235	235
B (mm)	175	245	245	245	285	285
C (mm)	395	390	390	390	435	435
D (mm)	500	500	500	500	620	620
E (mm)	535	545	575	570	715	715
F (mm)	585	585	640	640	820	820
G (mm)	865	780	890	885	1120	1120
H (mm)	-	890	1025	1250	1240	1390
I (mm)	1015	890	1025	1020	1240	1260
J (mm)	1040	930	1140	1430	1340	1590
Capacity (L)	170	200	250	300	400	500
Reheat from cold (minutes)	36	33	35	40	45	50
Reheat from 75% draw-off (minutes)	25	24	25	29	35	40
ERP Rating*	C	C	C	C	C	C
Immersion Rating (kW)	3	3	3	3	3	3
Standing Heat Loss (kWh/24hrs)	1.92	2.04	2.16	2.32	2.58	2.81

*Based on thermostat set a 60°C