


TEMPEST INDIRECT TWIN COIL SOLAR SLIMLINE



TECHNICAL DATA

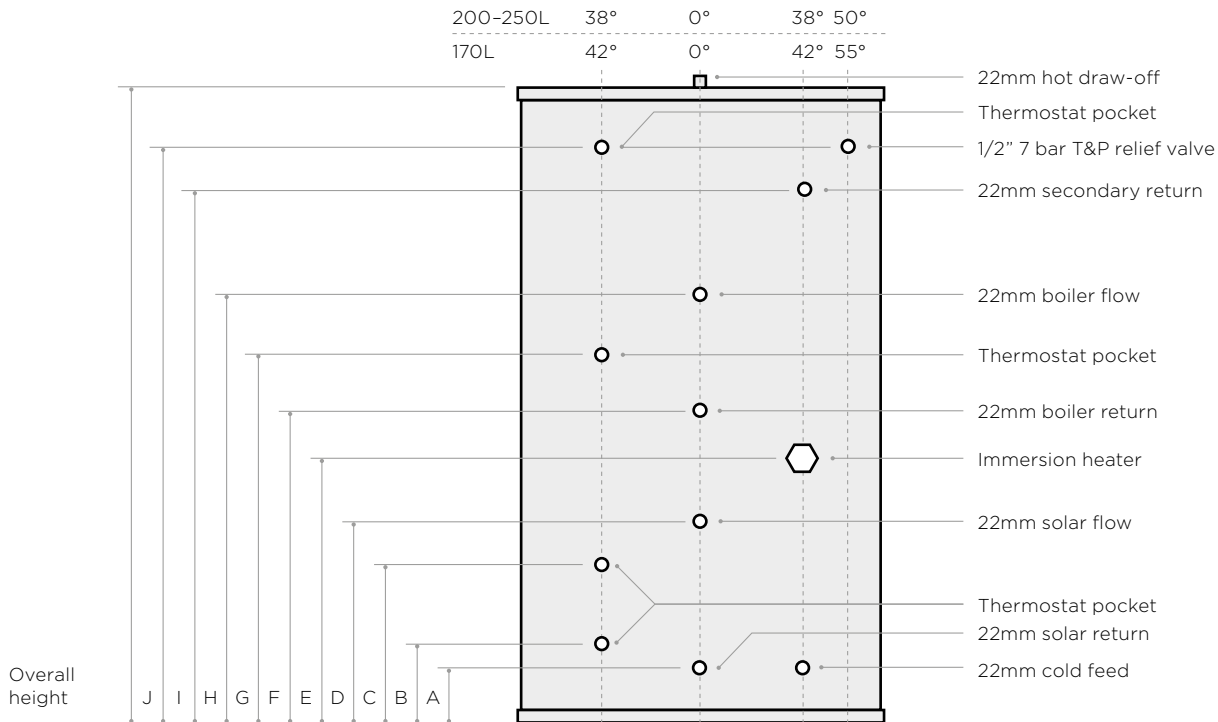

All unvented cylinders come with an unvented component kit to suit.

Capacity (L)	170	200	250
Height (mm)	1500	1800	1800
Diameter (mm)	470	470	510
A (mm)	150	190	190
B (mm)	155	245	245
C (mm)	370	390	390
D (mm)	475	500	500
E (mm)	510	545	575
F (mm)	560	585	640
G (mm)	840	860	890
H (mm)	990	1010	1025
I (mm)	-	1490	1490
J (mm)	1290	1590	1590
Capacity (L)	170	200	250
Reheat from cold (minutes)	36	33	35
Reheat from 75% draw-off (minutes)	25	24	25
ERP Rating*	C	C	C
Immersion Rating (kW)	3	3	3
Standing Heat Loss (kWh/24hrs)	1.92	2.04	2.16

*Based on thermostat set a 60°C